



# CFE-640S / 1280S / 2560S





## Advantages of CFE 640S/1280S/2560S

- Volumetric Energy Density increased by 23.5%
- LED power display screen and switch buttons
- Rugged stainless steel body ensures 5year warranty
- High protection level IP65
- Support 1C charge /discharge and excellent heat dissipation design
- Quick connection and insulation protection
- Stainless steel handles guarantees 3000 fatigue tests
- supports four external connections in series with voltage up to 51.2V

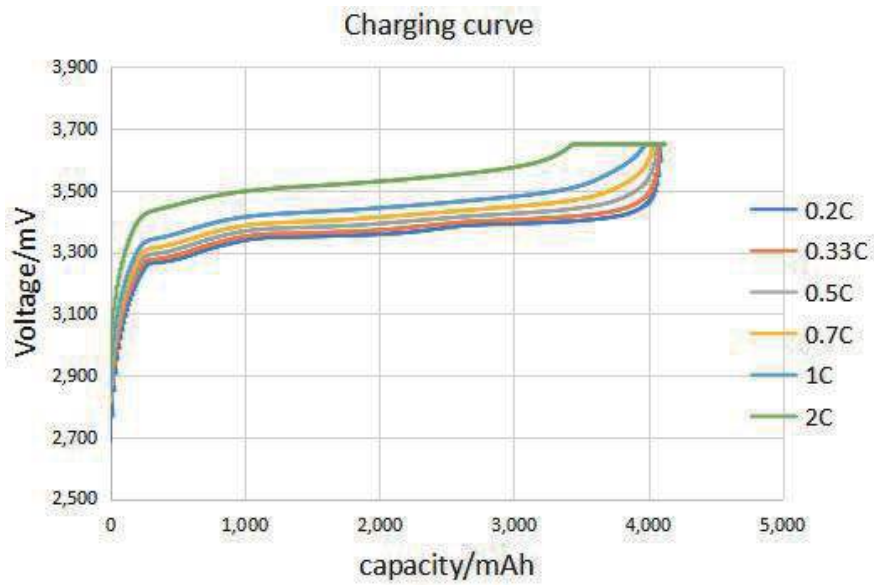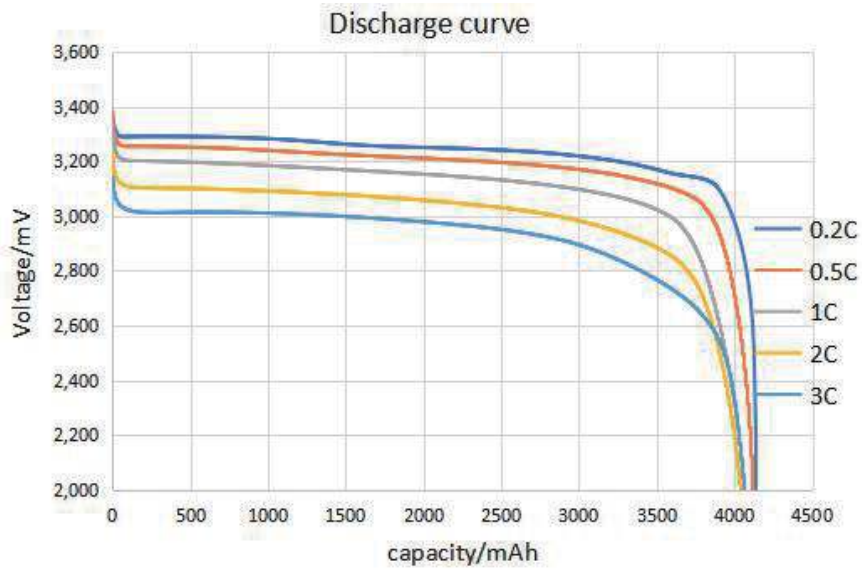

## Discharge curve

Operating Temperature	Charging: 0°C to 50°C
	Discharging : -20°C to 60°C
Storage Temperature	1 year : -20~25°C
	3 months : -20~45°C
	1 month : -20~60°C
Relative Humidity(R H)	20~60 (No Condensed Water)
Protection	IP65
Safety Certificate	CE
Transportation	UN38.3

## Charging curve

Voltage	Charging Voltage Cutoff	14.6V (Single battery: 3.65V)
	Maximal Continuous Charging Current	100A
Current	Maximal Continuous Discharging Current	100A
	Over Charge Detection Voltage	14.6V (Single battery: 3.65V)
Overcharge Protection	Over Charge Detection Delay time(mS)	1000±500
	Over Charge Release Voltage	14V (Single battery: 3.5V)
	Over Discharge Detection Voltage	10V (Single battery: 2.5V)
Over Discharge Protection	Over Discharge Detection delay time(mS)	1000±500
	Over Discharge Release Voltage	11.2V (Single battery: 2.8V)
	Detection Condition	Exterior Short Circuit
Short Circuit Protection	Detection Delay time	300±200uS
	Release Condition	Cut Load,Automatically Recover
Temperature Protection	Over Temperature Protection	65°C

## Main models & Technical spec

Index		Spec		
Name		CFE-640S	CFE-1280S	CFE-2560S
Model		12.8V50Ah	12.8V100Ah	12.8V200Ah
Nominal Voltage		12.8V	12.8V	12.8V
Nominal Capacity @1C		50Ah	100Ah	200Ah
Charge Voltage		14.6V	14.6V	14.6V
Charge Current	Recommended	25A	50A	50A
	Max Continuous	50A	100A	100A
Discharge Voltage Minimum		10V	10V	10V
Discharge Current Max Continuous		50A	100A	100A
Pulse Current 5 Sec		75A	150A	150A
Weight		5kg±0.5kg	12kg±0.5kg	18kg±0.5kg
Dimensions L*W*H (mm)		180*140*210	320*140*210	320*250*210



First-class power battery system supplier  
First-class supplier of energy storage and microgrid



Global Exclusive Distributor



### CF Energy Co., Ltd.

Company Address:

Intelligent Manufacturing Base , Xianyang , Shaanxi , PRC .

Tel: (+86) 029-38367888

Web:<http://www.cfenergy.net/> E-mail:[sales@cfpower.vip](mailto:sales@cfpower.vip)

### CNBM INTERNATIONAL CORPORATION

English Language

Felix Wang, Mob/Whatsapp/Wechat:0086-13717762770

Chris Wu, Mob/Whatsapp/Wechat:0086-18661316123

Erica Hu, Mob/Whatsapp/Wechat:0086-15222393724

Adeline Chen, Mob/Whatsapp/Wechat:0086-18303014060

Jerry Li, Mob/Whatsapp/Wechat:0086-18800427504

Spanish Language

Silvia Yan, Mob/Whatsapp/Wechat:0086-15701699087

E-mail: [solar@cnbmsolar.com](mailto:solar@cnbmsolar.com)